

Scale: Actual Scale



- 1. Place the template on the wall in the position the Modem will be mounted. (It is recommended to mount the Modem with the cable connections on the bottom).
- 2. Mark the mounting holes. If mounting on wood, drill holes for the screws. If mounting on drywall, drill holes to accept drywall anchors. A 3/16" drill bit is recommended for plastic anchors.
- 3. Leave screws extended about 0.2 inches from the wall.
- 4. Remove all 4 rubber feet from the bottom of the Modem.
- **5.** Locate the Modem keyhole openings over the screw heads and push down lightly on the Modem to lock the unit onto the screws.

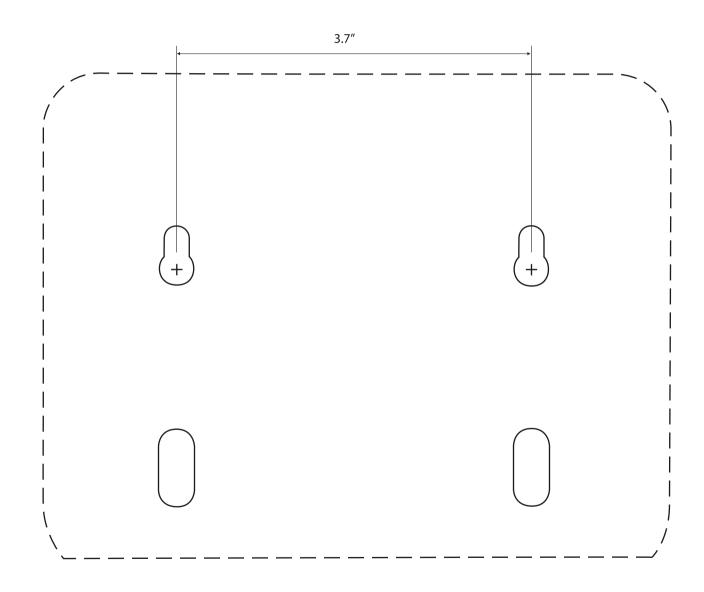



**Fasteners** 

